


PRECONSTRAINT

602 OPAQUE




602-50537
White



602-50539
Vanilla



602-50542
Grey

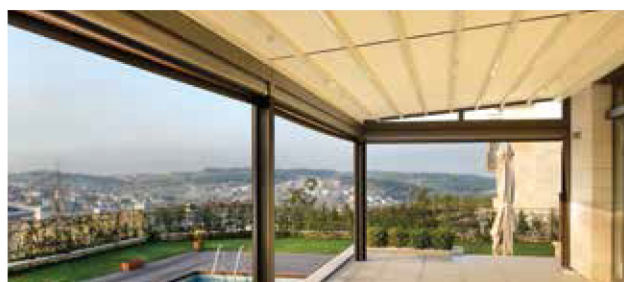

Technical properties	Préconstraint 602 Opaque	Standards
Yarn	1100 dtex PES HT	
Weight	750 g/m ²	EN ISO 2286-2
Width	267 cm	
Physical properties		
Tensile strength (warp/weft)	230/220 daN/ 5 cm	EN ISO 1421
Tear strength (warp/weft)	20/20 daN	DIN 53.363
Adhesion	9/9 daN/ 5 cm	EN ISO 2411
Surface treatment		
Finish	Varnish both sides	
Flame retardancy		
Rating	M2/NFP 92-507 • B1/DIN 4102-1 • M2/UNE 23.727-90 • BS 7837 • 1530.3/ AS NZS • NFPA 701 Method 2 • Schwerbrennbar-Q1-Tr1/ONORM A 3800-1 • Class E/EN 11925-2 (SITAC) - CSFM T19 • Euroclass B-s2d0 / EN 13501-1	
Management systems		
Quality		ISO 9001
Certifications, labels, guarantees, recycling		

